



ELECTRICAL CHARACTERISTICS

	435	324	440	328	445	332	450	335	455	339
	40.3	37.6	40.5	37.8	40.7	38.0	40.9	38.2	41.1	38.4
	10.80	8.62	10.87	8.67	10.94	8.73	11.01	8.78	11.08	8.84
	49.0	45.6	49.2	45.8	49.4	46.0	49.6	46.2	49.8	46.4
	11.33	9.15	11.40	9.20	11.47	9.26	11.54	9.32	11.61	9.37
	20.00		20.20		20.40		20.70		20.90	

C.
C

MECHANICAL CHARACTERISTICS

	Monocrystalline Silicon (9Busbar)
	144pcs in series (6*24)
	2094*1038*35mm (82.44*40.87*1.38inches)
	23.5kg (51.81lbs)
	3.2mm AR Coating Tempered Glass
	Anodized Aluminium Alloy
	IP68, 3 Bypass Diodes
	4mm ² (IEC), 12AWG(UL) 300mm in Length or Customized Length
	T01/LJQ-3-CSY/MC4/MC4-EV02

APPLICATION CONDITIONS

	1000V/1500V/DC
	-40°C~+85°C
	20A
	Class II



TEMPERATURE CHARACTERISTICS

	-0.36%/°C
	-0.26%/°C
	+0.043%/°C
	43±2°C


PACKING CONFIGURATION

	31	31(USA)
	715	682

I-V CURVE

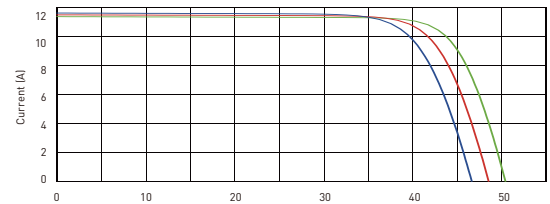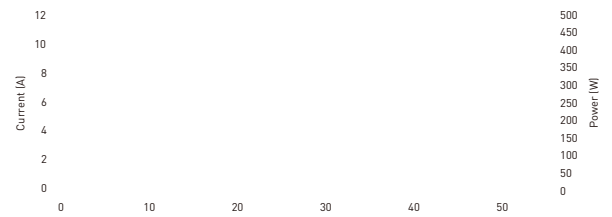

TECHNICAL DRAWINGS

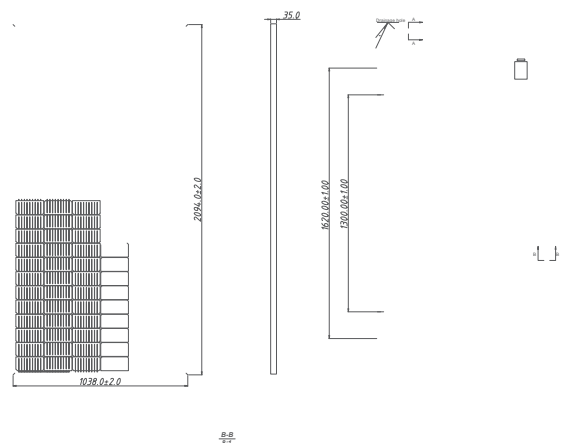

The specific information and features described in this data sheet may be subject to change without notice. Designing into a new R&D enhancement, Sun Tale Solar Technology Co., Ltd. reserves the right to make adjustments to the information described herein at any time without notice. Please always obtain the latest version of this data sheet which shall be the final binding contract made between the engineering and sales departments of the manufacturer and the customer.