




- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018




12 30

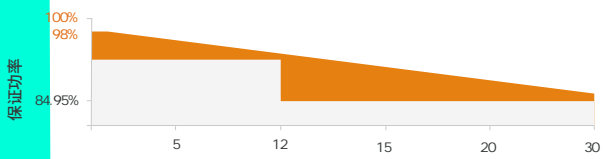

10BB

2%

0.45%



5%-25%



PID


85 / 85% RH 192



	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	395	294	400	298	405	302	410	306	415	310
	30.85	28.8	31.05	29.0	31.24	29.2	31.43	29.3	31.64	29.6
	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42	13.13	10.48
	36.75	34.6	37.00	34.8	37.25	35.1	37.50	35.3	37.75	35.5
	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24	14.02	11.30
	20.22		20.48		20.73		21.00		21.25	

	5%	10%	15%	20%	25%
	431	451	472	492	513
	31.43	31.43	31.43	31.43	31.43
	13.70	14.36	15.01	15.66	16.31
	37.50	37.50	37.50	37.50	37.50
	14.65	15.35	16.04	16.74	17.44

	10BB
	108 (6*18)
	1722*1134*30_ _ (67.80*44.65*1.18)
	25.5] Y (56.22Te)
	2.0_ _
	2.0_ _
	IP68, 3
	4_ _ , (IEC), 12AI G(GL) 350_ _ (+), 250_ _ (-)
	F01/LJQ-3-CEK/MC4/MC4-EHO2

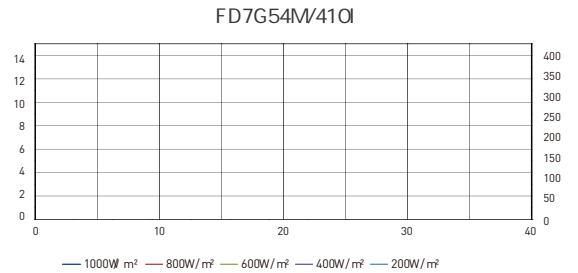

	1500H/DC
	-40, Cp+85, C
	30A
	C'See
	5400PS 2400PS
	70% f 5%

75°C 50°C 25°C

	36	36(GEA)
	936	720