



BIPRO

TM7G72M **144-cell**

570- 590W


16BB N



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 30

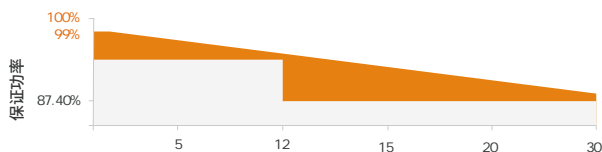

16BB

LID/LeTID
1% 0.4%



TOPCon

LCOE



PID


192 PID



| | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
|--|-------|------|-------|------|-------|------|-------|------|-------|------|
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | 22.10 | | 22.30 | | 22.50 | | 22.60 | | 22.80 | |

| | 5% | 10% | 15% | 20% | 25% |
|--|-------|-------|-------|-------|-------|
| | 609 | 638 | 667 | 696 | 725 |
| | 42.66 | 42.66 | 42.66 | 42.66 | 42.66 |
| | 14.28 | 14.96 | 15.64 | 16.32 | 16.99 |
| | 51.47 | 51.47 | 51.47 | 51.47 | 51.47 |
| | 14.96 | 15.68 | 16.39 | 17.10 | 17.81 |

| | | |
|--|--|--------|
| | N | 16BB |
| | 144 | (6*24) |
| | 2278*1134*30mm (89.69*44.65*1.18) | |
| | 31.8kg (70.11lbs.) | |
| | 2.0mm | |
| | 2.0mm | |
| | IP68, 3 | |
| | 4mm ² (IEC), 12AWG (UL) 350mm(+), 250mm(-) | |
| | T01/LJQ-3-CSY/MC4/MC4-EVO2 | |

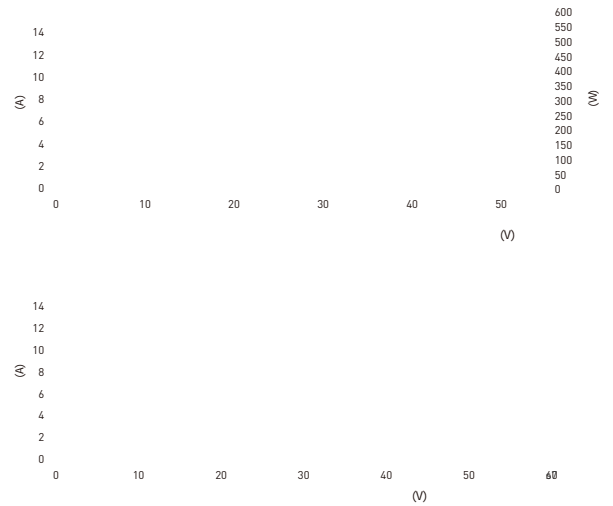

| | |
|--|---------------|
| | 1500V/DC |
| | -40°C~+85°C |
| | 30A |
| | Class |
| | 5400Pa 2400Pa |
| | 80%± 5% |

| | | |
|--|-----|---------|
| | 36 | 36(USA) |
| | 720 | 576 |